


#12 AWG BLUE INSULATED SOLID OR STRANDED COPPER LOCATOR WIRE OVER TOP OF ALL PIPE. PLACE WIRE IN SEWER TRENCH AT 36" DEPTH.

COMMON TRENCH FINAL BACKFILL COMPACTED TO STANDARD PROCTOR (95% IN R/W 100% UNDER PAVEMENT)

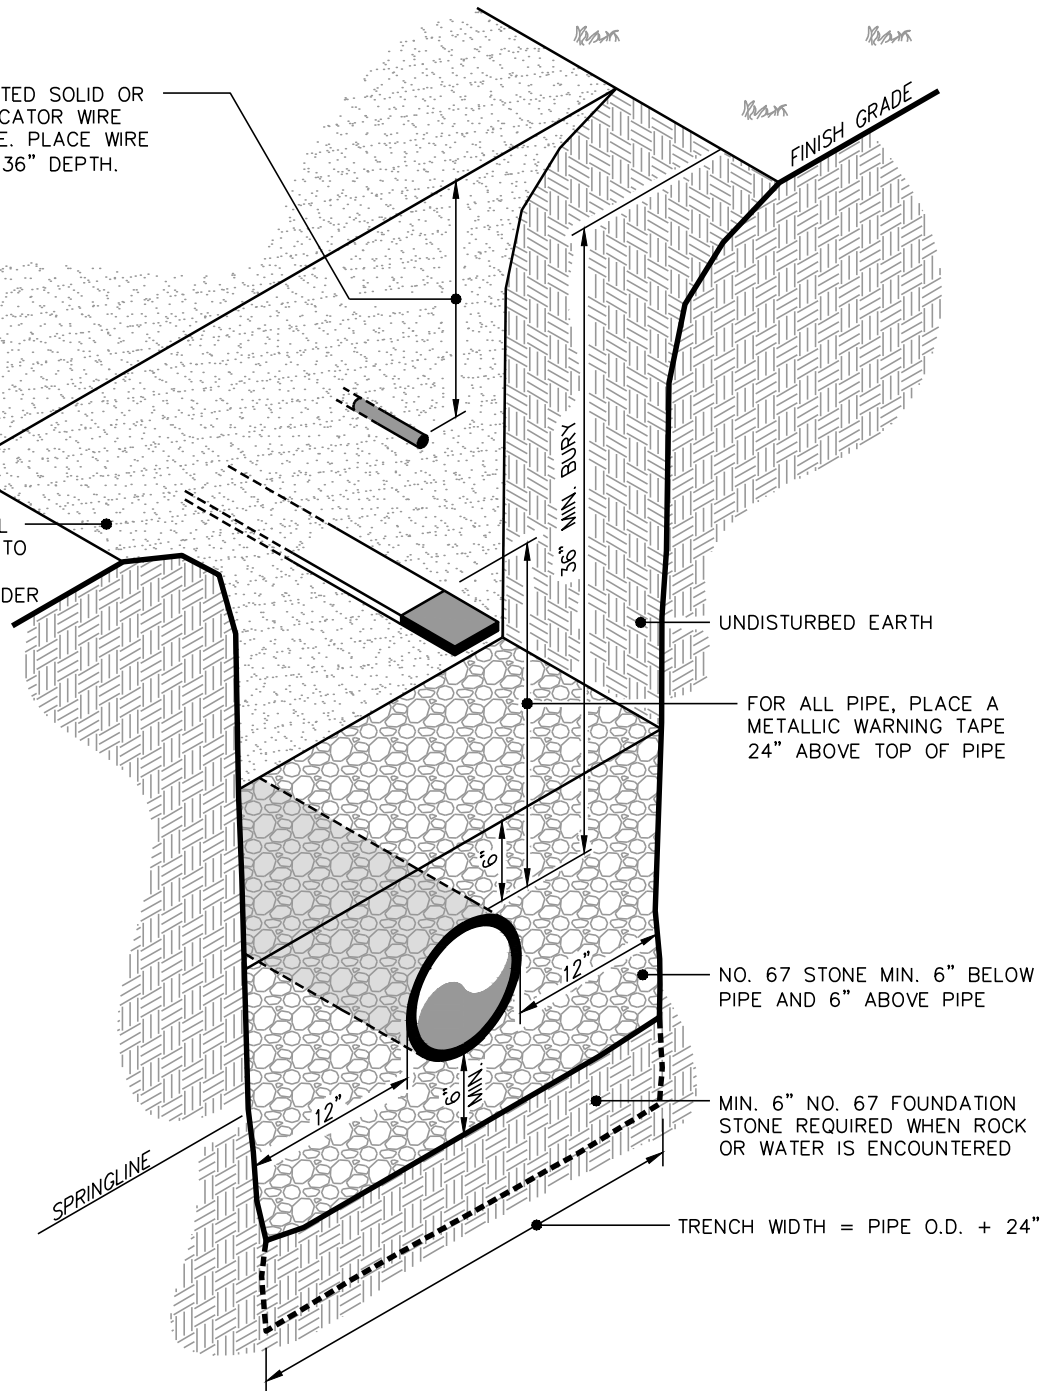

NOTES:

1. FOUNDATION STONE SHALL BE REQUIRED WHEN SOIL CONDITIONS ARE UNSUITABLE.
2. AN ADDITIONAL 1" DEPTH OF BEDDING MATERIAL WILL BE REQUIRED FOR EACH ADDITIONAL 2' OF TRENCH DEPTH IN EXCESS OF 16' UP TO A MAXIMUM OF 12".
3. SEE PAVEMENT REPAIR DETAIL FOR PIPE LAID WITHIN AN EXISTING PAVED STREET.



TITLE: SANITARY SEWER TRENCH	REV DATE: 3/9/17	DWG NO: SS.001
	PO BOX 1436 900 S. BECKFORD DRIVE HENDERSON, NC 27536	252-430-5728 (fax) 252-431-0124 www.ci.henderson.nc.us
CITY OF HENDERSON		SHEET #: 1 OF 1